
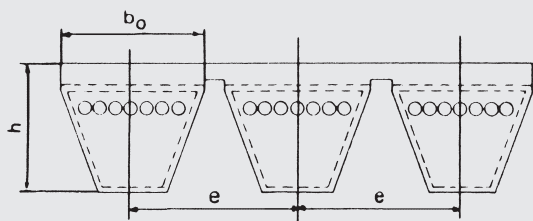



Technische Daten, Querschnittsmaße, Umrechnungswerte – Keilriemen

Kraftband-Profile, Hochleistungs-Schmalkeilriemen nach BS 3790 und DIN 7753/1

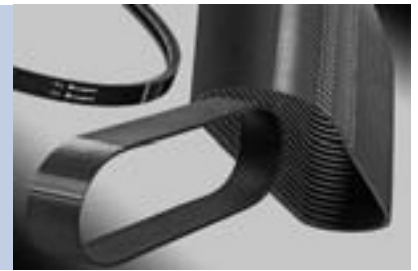


| Profil | 3V/9J | 5V/15J | 8V/25J | SPB | SPC | SPZ | SPA |
|---------------|-------|--------|--------|------|------|------|------|
| $b_0 \approx$ | 9 | 15 | 25 | 16,5 | 22 | 9,7 | 12,7 |
| $h \approx$ | 9,9 | 15,1 | 25,5 | 15,6 | 22,6 | 10,5 | 12,5 |
| $e \approx$ | 10,3 | 17,5 | 28,6 | 19,0 | 25,5 | | |

Kraftband-Profile – Keilriemen nach DIN 2215

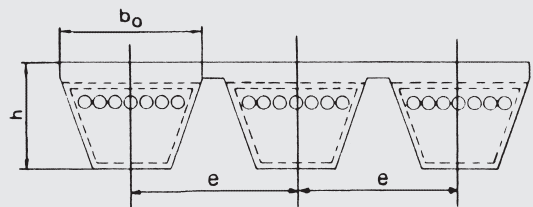

| Profil | A/HA | B/HB | C/HC | D/HD |
|---------------------|-------|-------|------|-------|
| $b_0 \approx$ | 13 | 17 | 22 | 32 |
| $h \approx$ | 9,9 | 13 | 16,2 | 22,4 |
| $L_a \approx L_1 +$ | 36 | 62 | 75 | 111 |
| $e \approx$ | 15,88 | 19,05 | 25,4 | 36,53 |

Doppelkeilriemen – Profile



| Profil | AA/HAA | BB/HBB | CC/HCC | DD/HDD | 22 x 22 | 25 x 22 |
|---------------|--------|--------|--------|--------|---------|---------|
| $b_0 \approx$ | 13 | 17 | 22 | 32 | 22 | 25 |
| $h \approx$ | 10 | 13 | 17 | 25 | 22 | 22 |

Irrtümer und Änderungen vorbehalten.